

static control solutions

a static-protective partnership

Continually enhancing our solutions to make your parts and supply ordering easier is what we're all about.

We're pleased to announce partnerships that allow ordering static control products directly from Panasonic.

Further simplify your purchasing by combining Panasonic spare parts with static control materials on a single purchase order to Panasonic.

less static in your day

Besides convenience, consider the additional benefits of taking advantage of this new solution:

- competitive pricing
- one less P/O to generate
- one less call, fax or online order
- potential shipping savings
- one less invoice
- more time for your many other tasks

07588

FOOT GROUND, HEEL, 1 MEG

- 18" long nylon polyester grounding tab
- Does not particulate; good body to ground contact
- Hook and loop fastening system
- Adjustable and comfortable
- Dual-layer rubber
- Non-marring interior



09039

WRIST STRAP KIT, 6FT CORD, 4MM

- Adjustable, non-slip material
- May be fitted to almost all people
- Elastic band
- Designed for user comfort



09070

WRIST STRAP, ELASTIC, ADJ, 6FT CORD, 4MM

- Adjustable, extra wide, soft elastic band for increased wearer comfort
- Silver impregnated nylon inside for superior conductivity
- Only one item to stock; fits most people
- Locking clasp—band locked so it will not slip



09814

CORD, GRND, FLR, 10MM STUD, NO RESISTOR, 15FT

- Low profile
- Reduces inadvertent snagging that may disconnect ground cord
- Easily snaps to mat 10mm stud snap flush to mat surface
- Stud has threaded hole; 6-32x1/4" flat head screw and countersunk washer provided
- Allows optional ground cord bolting to mat; keeps cord from disconnecting; ensures proper grounding
- Ring terminal at end of ground cord
- Can be used with work surface mat or floor mat



10435

CLEANER, SURFACE & MAT, REZTORE 1 QT

- Static dissipative solution
- Cleans and restores ESD mats
- Does not contain silicone
- Leaves no insulative residue
- Removes contaminants
- Eliminates possible source of ESD event
- Reztore™ special formula doesn't dry out mats like straight or diluted alcohol
- Low volatility



17155

Disposable Heel Grounder, High Visibility, Pack of 100

- Designed for guest single use
- Self-adhesive section for reliable adhering to underside of heel
- Yellow with black conductive stripe provides excellent visibility
- Electrical resistance 5 x 10E4 to 8 x 10E5 ohms end-to-end



17200 FOOT GROUND, HEEL, W/1MEG RESISTOR


- Durable heel grounder cup
- Non-marring interior
- Exceptionally tear resistant, dual layer rubber with inner scrim
- Hook and loop fastening assembly
- Genuine "non-selved" Velcro® material - adjustable and comfortable
- 30" long, 8 strand nylon polyester grounding tab
- Does not particulate; superior body to ground contact
- UL Listed



40935

MAT, STATFREE EB, ANTIFATIGUE, BLACK, 0.50 IN x 36 IN x 60 IN


- Ergonomic bubble air cell design improves worker comfort and productivity
- Support structure keeps in place
- Generous work area coverage
- RTG < 10E6 ohms when properly grounded
- Meets ESD protective flooring requirements of ANSI/ESD S20.20 and EIA-625
- 100% Premium Nitrile Butadiene Rubber
- Excellent value providing long-lasting life; consistent electrical properties; designed to not delaminate
- Superior heat, chemical and wear resistance
- Excellent choice in soldering and other challenging manufacturing environments—non-humidity dependence provides consistent electrical performance regardless of ambient humidity
- Dimensionally stable—minimal shrinkage and curling
- Lead-free RoHS compliant

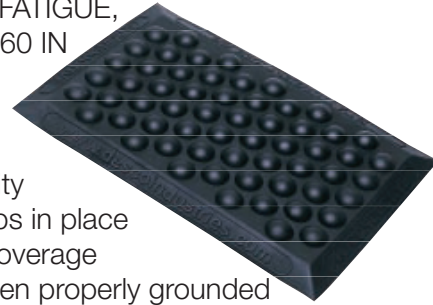

82067


MAT, STATFREE G2 W/GRD, RUBB, BLACK, .060 IN x 48 IN x 72 IN

- Heat, chemical and abrasion resistant
- Ideal for around wave solder machines and other challenging manufacturing environments.
- Visit <http://www.desco.com/pdf/MatResistance.html> for Chemical Resistance Chart.
- Configure to fit your requirements; easy to cut
- Durable homogeneous rubber; reversible rubber
- Designed to not delaminate
- Smooth surface on one side
- Easy to clean and maintain
- RTG < 10E9 ohms
- Meets ESD protective flooring requirements of ANSI/ESD S20.20 and EIA-625
- Top of mat kits laser engraved with ESD protective symbol and manufacturer; assists in identifying for control and auditing purposes
- Non-humidity dependence; provides consistent electrical performance regardless of ambient humidity
- Dimensionally stable—minimal shrinkage and curling
- Lead-free RoHS compliant

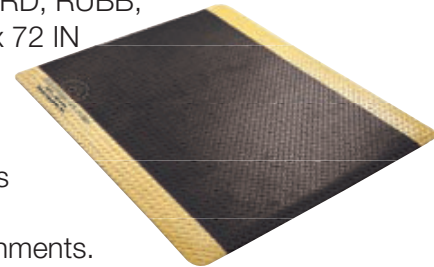

40981
MAT, STATFREE G2 W/GRD, RUBB,
BLACK, .060 IN x 48 IN x 72 IN

- Heat, chemical and abrasion resistant
- Excellent floor mat for around wave solder machines and other challenging manufacturing environments.
- Visit <http://www.desco.com/pdf/MatResistance.html> for Chemical Resistance Chart
- Easy to cut and configure to fit your requirements
- Durable homogeneous rubber designed to not delaminate
- Reversible rubber saves money, extends mat life
- Smooth surface on one side
- Easy to clean and maintain
- RTG <10E9 ohms
- Meets ESD protective flooring requirements of ANSI/ESD S20.20 and EIA-625
- Top of Mat kits laser engraved with ESD protective symbol and manufacturer; assists in identifying for control and auditing purposes
- Provides consistent electrical performance regardless of ambient humidity
- Dimensionally stable—minimal shrinkage and curling
- Lead-free RoHS compliant

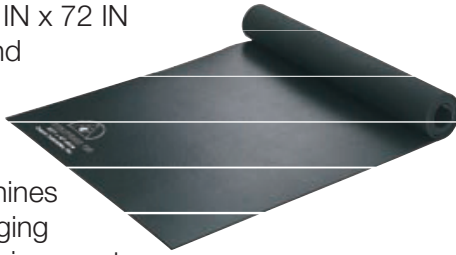

ANTISTATIC CLEAN ROOM GARMENT DIAMOND BLUE

- Lapel-style collar, set-in sleeve & standard 3-pocket configuration
- Fabric weight: 3oz/sq yd
- 98% polyester, 2% conductive fibers (carbon-suffused monofilament nylon) knit in grid pattern
- Meets normal FR requirements for polyester fabrics
- Carbon-suffused monofilament conductive at 10^4 , non-flaking, non-sloughing
- Surface resistivity is initially 10^6 ohms per sq
- Finish is disperse-dyed heat set; contains no softeners, hand builders, etc.
- Designed to not crock or bleed onto other surfaces
- Glass transition rate 450°F , flash point 720°F
- Excellent shielding properties for use in applications where grounding the garment in unnecessary
- Life expectancy: minimum 100 washings or 2 years (whichever comes first)



ESD LAB COAT SM
ESD LAB COAT MED
ESD LAB COAT LRG
ESD LAB COAT XLG

If larger sizes are required, call for part numbers.

**one order today,
one receipt tomorrow:
no static.**

phone: 847-495-6200
fax: 847-495-6092
online: www.panasonicfa.com
email: PFSA-partscs@us.panasonic.com

